




# ENERDRIVE CANADA LTD. *-Engineered with our Heart*


Maintenance free braking system  
Quick, easy replaceable stuffing box  
Continuous filtering system

PCP Drive Head and Digital Production Optimization System  
Patent pending in Canada, USA, and Australia


Three(3) Year Limited Warranty




Single Motor Drive 10-30HP

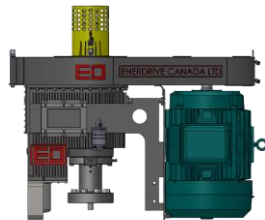


Single Motor Drive 30-125HP

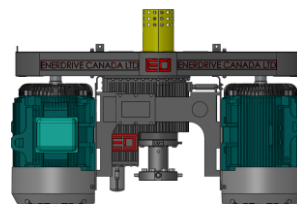


Dual Motor Drive 125hp




Dual Motor Drive 250hp



Hydraulic Drive 60hp  
(Forged and precision ground gear and pinion)



Single Motor gear drive up 125hp



Dual Motor gear drive 75-250hp




Downhole Wireless Pump-off Control System



Rod string locking BOP.  
Any API flange, thread combinations.

**Drive Head Specifications:**

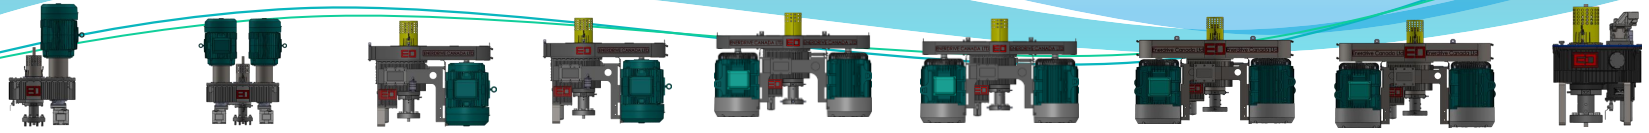

MODEL	ED-125EG	ED-150/250EG	ED-30E	ED-75E	ED-100E	ED-150E	ED-200E	ED-250E	ED-60H
Continuous Torque	1800/3000ft-lbs	3500/4000ft-lbs	800ft-lbs	2000/3000 ft-lbs	3000/4000 ft-lbs.	3000/4000 ft-lbs	3000/4000 ft-lbs.	3000/4000ft-lbs	1500 ft-lb
Continues Braking Torque	Hydraulic Brake 3000 ft-lb	Hydraulic Brake 4000 ft-lb	Hydraulic Brake 800 ft-lb	Hydraulic Brake. 3000ft-lb	Hydraulic Brake. 4000ft-lb	Hydraulic Brake. 4000ft-lb	Hydraulic Brake. 4000ft-lb	Hydraulic Brake 4000ft-lb	Hydraulic Brake 1500ft-lb
Power Rating	15-125hp	75-250hp	15-30hp	30-75hp	100hp	150hp	200hp	250hp	60hp
Axial Load Rating	Ca1370/1680KN	Ca1370/1680KN	Ca 980KN	Ca 1370KN	Ca1370/1680KN	Ca 1370 /1680KN	Ca1370 /1680KN	Ca1370/1860KN	Ca 1370 KN
Sheave Speed Rating	150-450rpm	150-450rpm	150-500rpm	150-500rpm	150-450rpm	150-450rpm	150-450rpm	150-450rpm	0-300rpm
Stuffing Box	Field replaceable	Field replaceable	Field replaceable	Field replaceable	Field replaceable	Field replaceable	Field replaceable	Field replaceable	Field replaceable
Stuffing Box Temp Rating	Seal temp rating is 200°C	Seal temp rating is 200°C	Seal temp rating is 200°C	Seal temp rating is 200°C	Seal temp rating is 200°C	Seal temp rating is 200°C	Seal temp rating is 200°C	Seal temp rating is 200°C	Seal temp rating is 200°C
VFD Speed Rating	50-450rpm	Gear ratio: 1:6.05 to 1:6.5	50-500rpm	50-500rpm	50-450rpm	50-450rpm	50-450rpm	50-450rpm	Gear ratio: 1:4.56
Polished Rod Sizes	2", 1 ½", 1 ¼"	2", 1 ½", 1 ¼"	1 ¼", 1 ½"	2", 1 ½", 1 ¼"	2", 1 ½", 1 ¼"	2", 1 ½", 1 ¼"	2", 1 ½", 1 ¼"	2", 1 ½", 1 ¼"	2", 1 ½", 1 ¼"
Wellhead Connection	3-1/8" -3000# 4-1/16"-3000# 5-1/8"-2000# or any connections	3-1/8" -3000# 4-1/16"-3000# 5-1/8"-2000# or any connections	3-1/8" -3000# or any connections	3-1/8" -3000# 4-1/16"-3000# 5-1/8"-2000# or any connections	3-1/8" -3000# 4-1/16"-3000# 5-1/8"-2000# or any connections	3-1/8" -3000# 4-1/16"-3000# 5-1/8"-2000# or any connections	3-1/8" -3000# 4-1/16"-3000# 5-1/8"-2000# or any connections	3-1/8" -3000# 4-1/16"-3000# 5-1/8"-2000# or any connections	3-1/8" -3000# 4-1/16"-3000# or any connections
Electric Motor Mount	Face Mount	Face Mount	215T-254T	256T-286T	326T - 445T Frame (160M - 315S/M)	326T - 445T Frame (160M - 315S/M)	326T - 445T Frame (160M - 315S/M)	326T - 445T Frame (160M - 315S/M)	**
Overall Height	34"-65"	34"-65"	38"	42"	42"	42"	50"	50"	32"
Overall Weight	1350 lbs	550-2500lbs	850lbs	1250lbs	1950lbs	1950 lbs	2400lbs	2400 lbs	800 lbs